





Note: Bolts supplied by Nevco

DETAIL Note 3

Notes:

1. Set the top on the bottom cabinet.
2. The Top cabinet face overlaps the bottom.
3. Open "Period" door and attach the bottom to the top section using three provided bolts/washers. Bolts must be 1 3/4" long.
4. The Side scoreboards mount independantly and are labeled "Home" and "Guest" on the top by the coax input.

<p>Four Section Indoor LED Scoreboard Installation</p>		 <p>Nevco, Inc. Greenville, Illinois 62246</p>
<p>Last ECO</p>		
<p>Drawn DLP</p>	<p>Date 4/11/13</p>	<p>Sheet 1 of 2</p>

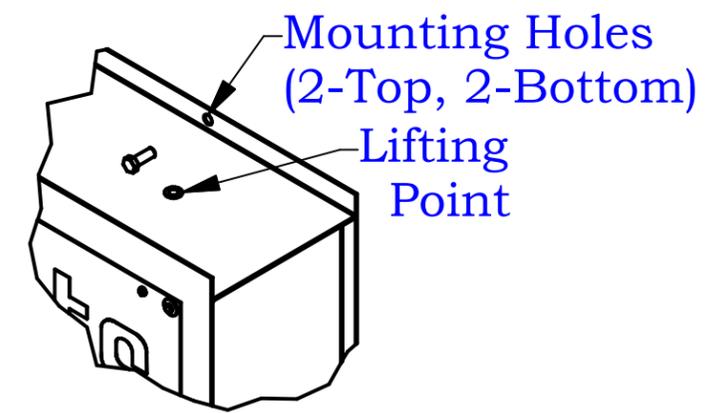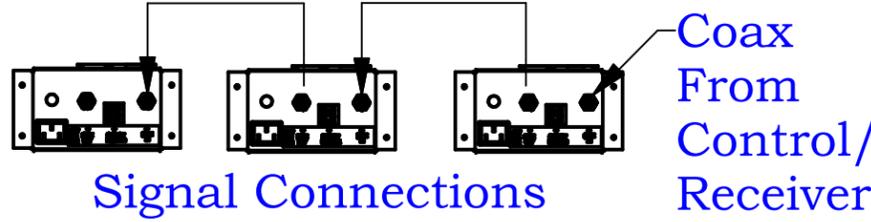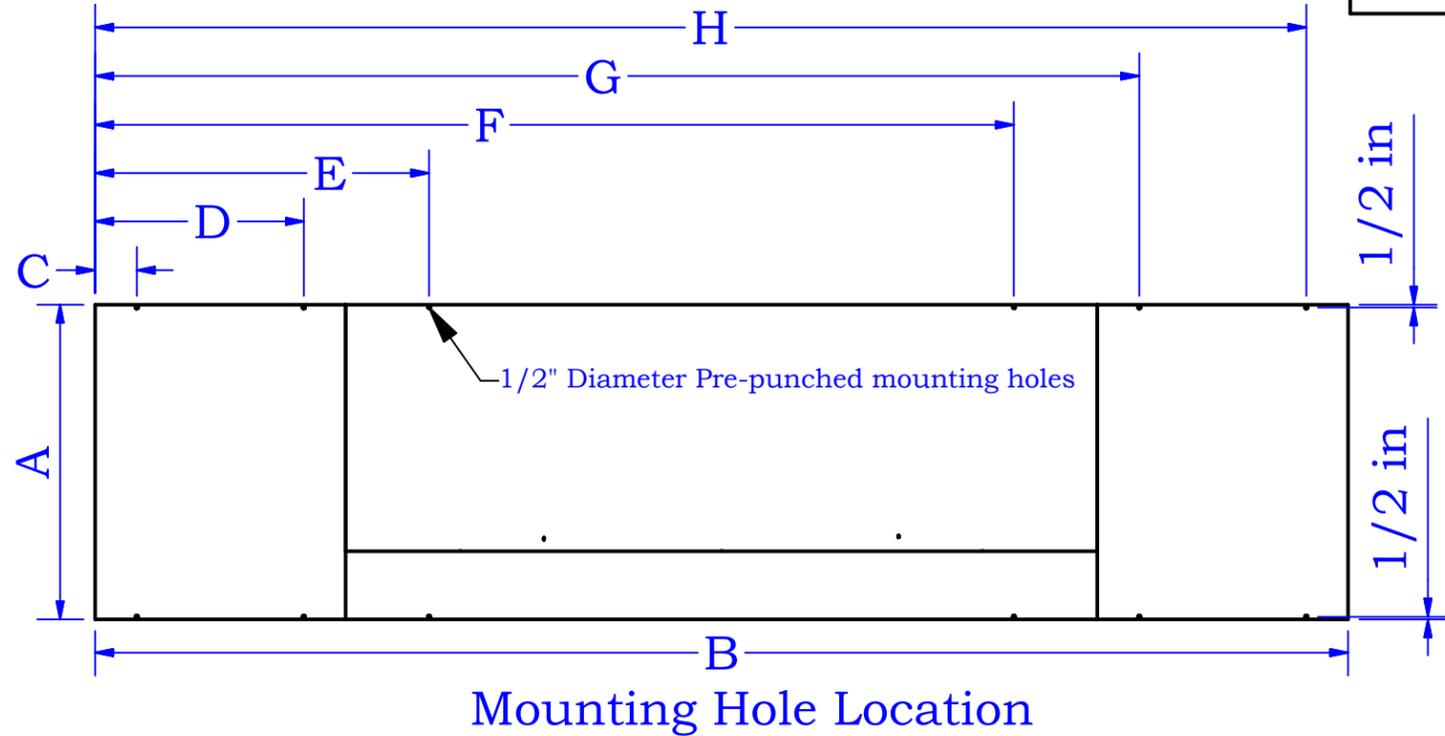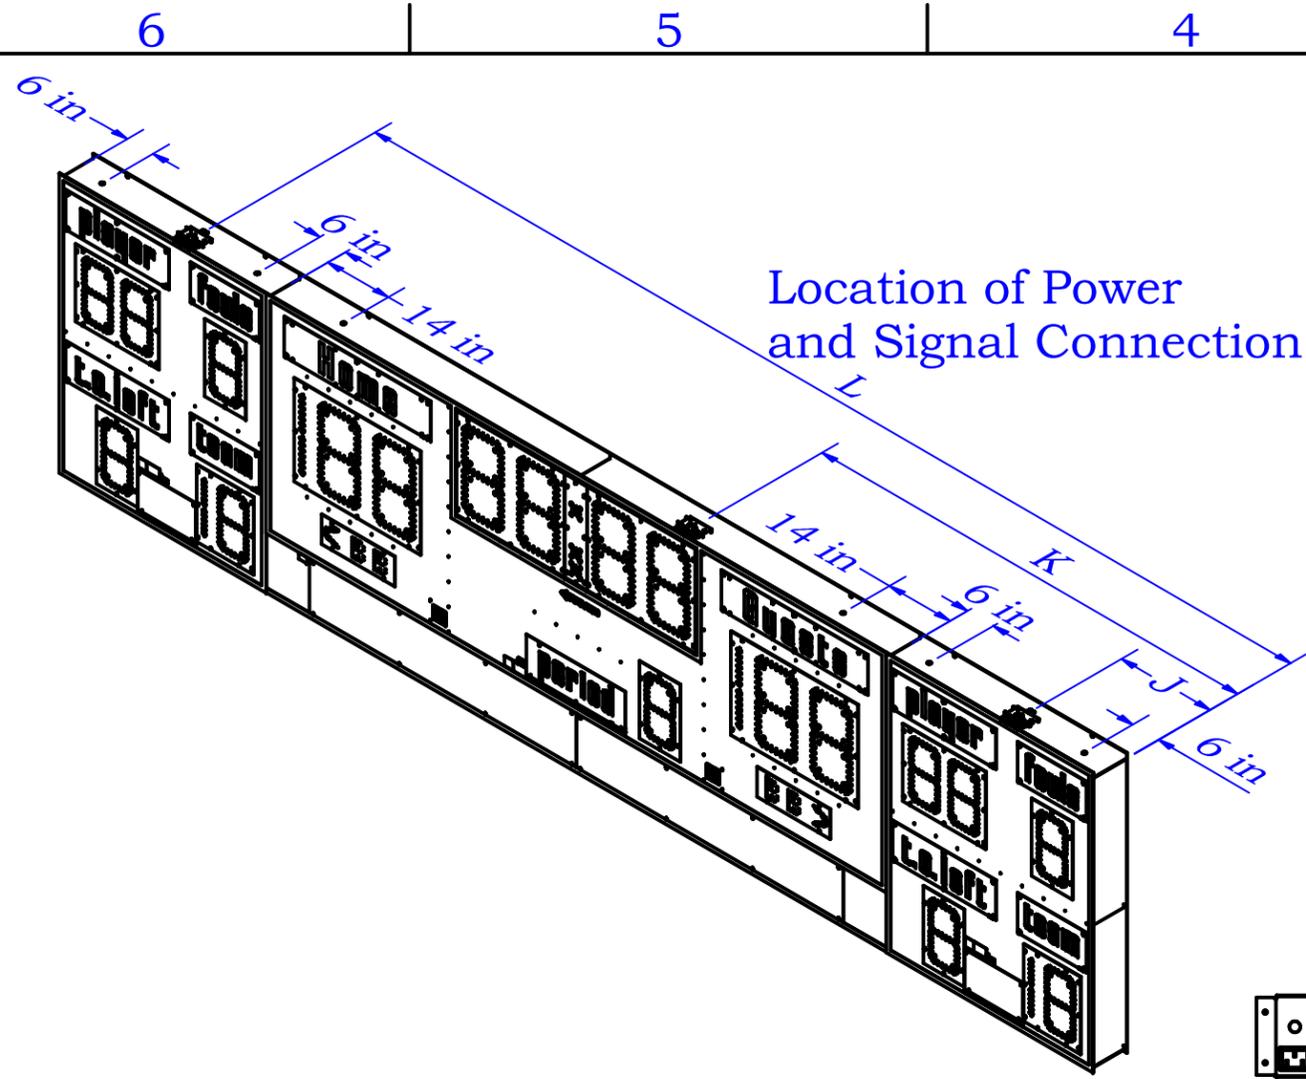

Model	Amps (120VAC)				Amps (240VAC)				Scbd Size		Mounting Holes Location						Power Location			Hanging Weight
	-NL	-RL	-ETN-NL	-ETN-RL	-NL	-RL	-ETN-NL	-ETN-RL	A	B	C	D	E	F	G	H	J	K	L	
2745	1.5	1.8	1.8	2.0	0.8	0.9	0.9	1.0	60"	240"	8"	40"	64"	176"	200"	232"	20 1/2"	96 1/2"	212 1/2"	254lbs
4730	1.88	2.23	2.2	2.44	0.94	1.12	1.1	1.23	60"	288"	8"	64"	88"	200"	224"	280"	36"	120 1/2"	288"	300lbs
4760	1.98	2.39	2.3	2.6	1	1.2	1.16	1.31	60"	288"	8"	64"	88"	200"	224"	280"	36"	120 1/2"	288"	325lbs

- Notes:**
1. Lifting Point 3/8-16 Eyebolts can be threaded into the lifting point to lift the scoreboard for mounting or for suspension mount. Eyebolts can be removed after the scoreboard is mounted.
 2. Mount Scoreboard securely using 3/8" bolts or anchors and supplied washers using the existing mounting holes or drill 1/2" alternate locations.
 3. This sign is intended to be installed in accordance with the requirements of Article 600 of the Nationale Electric Code and/or other applicable codes. This includes proper grounding and bonding of the sign.
 4. Connect Coax to closet input, then daisy chain supplied coax cables from output to the next input, then from that output to the next input. See "Signal Connections"

Four Section Indoor LED Scoreboard Installation

Last ECO

Drawn **DLP** Date **4/11/13**

NEVCO

Nevco, Inc.
Greenville, Illinois 62246

Drawing No. **241-0288**

Sheet **2** of **2**