



**SOCCER**


SCOREBOARDS

# MODEL 1615

**Size:** 16' x 7' x 8" (4.88 x 2.13 x .20 meters)

**Approximate hanging weight:** 350 lbs. (160 kg) **With ETNs:** 405 lbs. (184 kg)

**Digit Size:** 18" **Digit Color:** High Intensity Red, Amber, or Translucent White

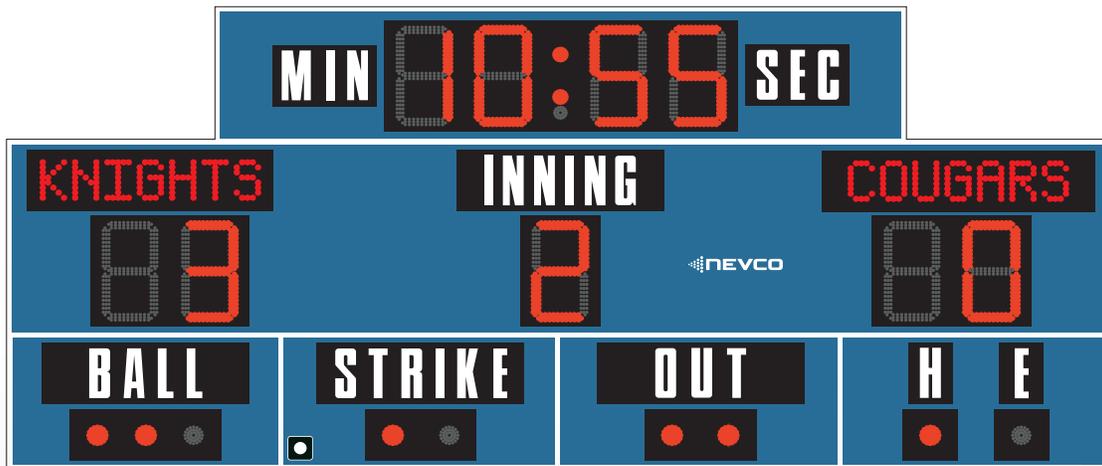

## Perfect scoreboard with advanced timing features ideal for multi-purpose fields.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Electronic Team Names (ETNs) available in place of Home and Guest caption plates.
- Includes Hit and Error Indicators.
- Large digits easily seen from long distances.
- White outline striping separates features for greatest readability.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installations.
- Flush sign mounting.

\* Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard.

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 1615 (Outdoor) Baseball/Softball/Soccer Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1615	MPC(W)-4/5/6	MPCW WIRELESS	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
<b>INNING</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
<b>INDICATORS</b> 3" Diameter High Intensity Red, Amber, or Translucent White LED cluster	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR	THREE FOR BALL TWO FOR STRIKE TWO FOR OUT ONE FOR HIT ONE FOR ERROR
<b>TIME OF DAY</b>	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	N/A
<b>HORN</b>	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. Can sound manually at any time.
<b>PITCH COUNT</b>	N/A	Supported. Integrates with PCD display. Controlled by hand-held switches.	Supported. Integrates with PCD display. Requires Pitch Count MPCX <sub>2</sub> control.
<b>PITCH TIMER</b>	N/A	Supported. Integrates with 9520 display. Controlled by hand-held switches.	Supported. Integrates with 9520 display. Requires SCD/DGT MPCX <sub>2</sub> control.
<b>SEGMENT TIMING</b>	Requires MPCW-6 or 7. Controlled by hand-held switches.	Supported. Controlled by hand-held switches.	Supported. Requires Segment Timer MPCX <sub>2</sub> control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 16'L x 7'H x 8"D (4.88 x 2.13 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 350 lbs. (160 kg) or 405 lbs. (184 kg) with ETNs.

**CAPTIONS:** HOME, GUESTS, MIN, SEC, INNING/PERIOD, BALL, STRIKE, OUT, H, E, white 10" high. (HOME and GUESTS are omitted when ordered with ETNs.)

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER WITH ETNS (RED/AMBER):** 120 VAC, 2.3 Amps, 50/60 Hz. / 240 VAC, 1.1 Amps, 50/60 Hz. Requires earth ground.

**POWER WITHOUT ETNS (RED/AMBER):** 120 VAC, 1.3 Amps, 50/60 Hz. / 240 VAC, 0.6 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS (TRANSLUCENT WHITE):** 120 VAC, 3.1 Amps, 50/60 Hz. / 240 VAC, 1.6 Amps, 50/60 Hz. Requires earth ground.

**POWER WITHOUT ETNS (TRANSLUCENT WHITE):** 120 VAC, 2.2 Amps, 50/60 Hz. / 240 VAC, 1.1 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [NEVCO.COM/WARRANTY-LIMITATION](http://NEVCO.COM/WARRANTY-LIMITATION)

**U.S. SERVICE:** 1-800-851-4040

**INTERNATIONAL SERVICE:** 1-618-664-0360

**CANADA SERVICE:** 1-800-461-8550

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)



MAXIMIZE YOUR IMPACT®