



HOCKEY

SCOREBOARDS


MODEL 4725



Size: 16' x 3' x 8" (4.88 x .91 x .20 meters)


Approximate hanging weight: 140 lbs. (64 kg)

Digit Size: 13"/9" **Digit Color:** High Intensity Red & Amber

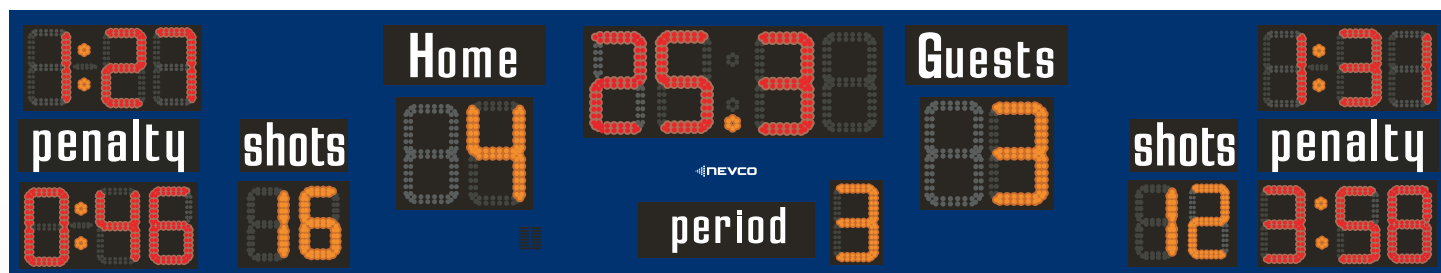

Advanced timing features ideal for Hockey Facilities.

- Energy-efficient LEDs reduce power consumption and operating expense.
- Ability to retrofit team name caption plates.
- Bright, long lasting LED lamp banks when ordered with rear-lit team names.
- Large, 9" penalty timers included.
- Soccer available with MPCX₂ and MPC7 series controls.
- Durable and lightweight cabinet design.
- Universal—syncs with Nevco accessories.
- Extended advertising opportunities.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Built-in Power Factor Correction.

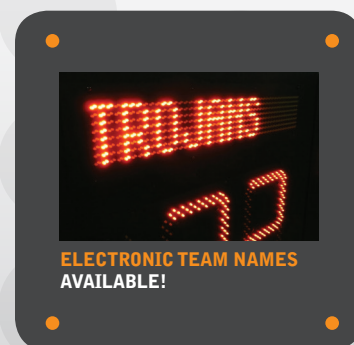

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 4725 (Indoor) Hockey Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 4725	MPC WIRED	MPCW WIRELESS	MPCX ₂ WIRELESS
TIMING 13" High Intensity Red LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	N/A
TEAM SCORES 13" Amber LED Digits	Displays 0-99	Displays 0-99	N/A
PERIOD 9" Amber LED Digits	Displays 0-9	Displays 0-9	N/A
SHOTS 9" Amber LED Digits	Displays 0-99	Displays 0-99	N/A
PENALTY TIMERS 9" High Intensity Red LED Digits	Displays two for each team. 0:00-9:59	Displays two for each team. 0:00-9:59	N/A
TIME OF DAY	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day". "Time of day" can still display after control turned off.	N/A
HORN Two located in scoreboard	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	N/A
JUNCTION BOXES	Two (2) 4"x2 1/8" with covers, furnished per scoreboard for installation.	N/A	N/A
CONTROL CABLE	One (1) length required of 2-WIRE (coaxial type) 1/4" diameter. Order length required.	N/A	N/A
SEGMENT TIMING	Supported.	Supported.	Requires MPCX ₂ segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.

#103 Cardinal Red	#73 Maroon	#102 Team Orange	#99 Golden Yellow	#142 Kelly Green	#74 Forest Green	#120 Teal Blue	#72 Electronic Blue	#140 Royal Blue	#121 Midnight Blue	#141 Navy Blue	#104 Medium Purple	#70 Desert Tan	#95 Silver Gray	#76 Print Black
-------------------------	---------------	------------------------	-------------------------	------------------------	------------------------	----------------------	---------------------------	-----------------------	--------------------------	----------------------	--------------------------	----------------------	-----------------------	-----------------------

AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 16'L x 3'H x 8"D (4.88 x .91 x .20 meters), constructed of aluminum. Hanging weight approximately 140 lbs. (64 kg).

CAPTIONS: HOME, GUESTS, PERIOD, SHOTS (2), PENALTY (2), white 6" high. (HOME and GUESTS are omitted when ordered with ETNS.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITHOUT ETNS: 120 VAC, .72 Amps, 50/60 Hz. / 240 VAC, .37 Amps, 50/60 Hz. Requires earth ground.

POWER WITH REAR-LIT CAPTIONS: 120 VAC, .89 Amps, 50/60 Hz. / 240 VAC, .45 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS: 120 VAC, .93 Amps, 50/60 Hz. / 240 VAC, .47 Amps, 50/60 Hz. Requires earth ground.

POWER WITH REAR-LIT CAPTIONS AND ETNS: 120 VAC, 1.04 Amps, 50/60 Hz. / 240 VAC, .52 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature optical isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: WWW.NEVCO.COM/INFO/GUARANTEE.PHP

U.S. SERVICE: 1-800-851-4040. **INTERNATIONAL SERVICE:** 1-618-664-0360. **CANADA SERVICE:** 1-800-461-8550.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM