


# **MODEL 3656**

**Size:** 18' x 8' x 8'' (5.49 x 2.44 x .20 m)

Approximate hanging weight: 420 lbs. (191 kg) with ETNs: 482 lbs. (219 kg) Digit Size: 24"/18" Digit Color: High Intensity Red, Amber, or Translucent White





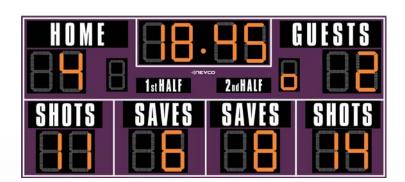



SHOWN WITH OPTIONAL WHITE LEDS



SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

### Advanced timing features ideal for Soccer, Lacrosse and Field Hockey facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- · Gasketed digits reduces water intake.
- Includes Half Indicator and built-in Horn.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- \* Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard.



**BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:** WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360 FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

### **INTEGRATED DISPLAY AND SCORING SOLUTIONS**

## Model 3656 (Outdoor) Soccer/Lacrosse/Field Hockey Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

M0DEL 3656	MPC(W)-4/5/6	MPCW-7	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Displays 0-99	Displays 0-99
HOME SHOTS 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Displays 0-99	Displays 0-99
<b>GUEST SHOTS</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Displays 0-99	Displays 0-99
HOME SAVES 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Displays 0-99	Displays 0-99
<b>GUEST SAVES</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	N/A	Displays 0-99	Displays 0-99
HALF 18" High Intensity Red, Amber, or Translucent White LED Digits	N/A	LED Indicators illuminate for 1st or 2nd half.	LED Indicators illuminate for 1st or 2nd half.
HORN	N/A	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
SEGMENT TIMING	N/A	MPCX Segment Timer control required.	MPCX <sub>2</sub> Segment Timer control required.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.

#103 Cardinal Red	#73 Maroon	#102 Team Orange	#99 Golden Yellow	#142 Kelly Green	#74 Forest Green	#120 Teal Blue	#72 Electronic Blue	#140 Royal Blue	#121 Midnight Blue	#141 Navy Blue	#104 Medium Purple	#70 Desert Tan	#95 Silver Gray	#76 Print Black
-------------------------	---------------	------------------------	-------------------------	------------------------	------------------------	----------------------	---------------------------	-----------------------	--------------------------	----------------------	--------------------------	----------------------	-----------------------	-----------------------

**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA. **SCOREBOARD:** Size 18'L x 8'H x 8"D (5.49 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Four (4) brackets provided for mounting. Hanging weight approximately 420 lbs. (191 kg) with ETNs 482 lbs. (219 kg).

**CAPTIONS:** HOME, GUESTS, SHOTS (2), SAVES (2), white 15" high. 1st HALF, 2nd HALF, white 6" high

 $\textbf{LED UNITS:} \ \ \textbf{Seven-bar segmented digits with protective aluminum cover.}$ 

**POWER WITHOUT ETNS (RED/AMBER):** 120 VAC, 3.2 Amps, 50/60 Hz. / 240 VAC, 1.6 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS (RED/AMBER):** 120 VAC, 4.4 Amps, 50/60 Hz. / 240 VAC, 2.2 Amps, 50/60 Hz. Requires earth ground.

**POWER WITHOUT ETNS (TRANSLUCENT WHITE):** 120 VAC, 5.4 Amps, 50/60 Hz. / 240 VAC, 2.7 Amps, 50/60 Hz. Requires earth ground.

**POWER WITH ETNS (TRANSLUCENT WHITE):** 120 VAC, 6.5 Amps, 50/60 Hz. / 240 VAC, 3.2 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature optical isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION

U.S. SERVICE: 1-800-851-4040 INTERNATIONAL SERVICE: 1-618-664-0360 CANADA SERVICE: 1-800-461-8550



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360 FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM