



BASEBALL & SOFTBALL

SCOREBOARDS


MODEL 3656

Size: 18' x 8' x 8" (5.49 x 2.44 x .20 m)

Approximate hanging weight: 420 lbs. (191 kg) **with ETNs:** 482 lbs. (219 kg)

Digit Size: 24"/18" **Digit Color:** High Intensity Red, Amber, or Translucent White

* Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard

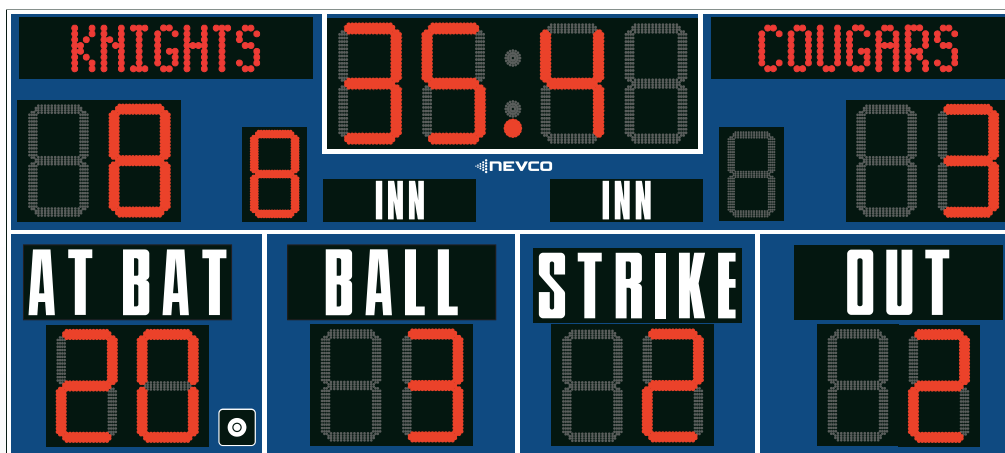

Advanced timing features ideal for combination Baseball, Football, Soccer, Lacrosse and Field Hockey facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Large digits easily seen from long distances.
- Designed to withstand wind load speed zones exceeding 150 mph.
- Includes Time Outs Lefts and built-in Horn.
- White outline striping separates features for greatest readability.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.
- Flexible mounting. Can mount directly to columns OR on laterals for complex or retro-fit installation.
- Flush sign mounting.



Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 3656 (Outdoor) Baseball/Football/Soccer/Lacrosse/Field Hockey Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 3656	MPCW-7	MPCX ₂ WIRELESS
TIMING 24" High Intensity Red, Amber, or Translucent White LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
TEAM SCORES 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
AT BAT 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
BALL 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
STRIKE 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
OUT 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
INNING 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
HORN	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
SEGMENT TIMING	Supported.	MPCX ₂ Segment Timer control required.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.

#103 Cardinal Red	#73 Maroon	#102 Team Orange	#99 Golden Yellow	#142 Kelly Green	#74 Forest Green	#120 Teal Blue	#72 Electronic Blue	#140 Royal Blue	#121 Midnight Blue	#141 Navy Blue	#104 Medium Purple	#70 Desert Tan	#95 Silver Gray	#76 Print Black
-------------------------	---------------	------------------------	-------------------------	------------------------	------------------------	----------------------	---------------------------	-----------------------	--------------------------	----------------------	--------------------------	----------------------	-----------------------	-----------------------

AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 18'L x 8'H x 8"D (5.49 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 420 lbs. (191 kg) with ETNs: 482 lbs. (219 kg).

CAPTIONS: HOME, GUESTS, AT BAT, BALL, STRIKE, OUT white 15" high. INN white 6" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

POWER WITHOUT ETNS (RED/AMBER): 120 VAC, 3.2 Amps, 50/60 Hz. / 240 VAC, 1.6 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (RED/AMBER): 120 VAC, 4.4 Amps, 50/60 Hz. / 240 VAC, 2.2 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (TRANSLUCENT WHITE): 120 VAC, 5.4 Amps, 50/60 Hz. / 240 VAC, 2.7 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (TRANSLUCENT WHITE): 120 VAC, 6.5 Amps, 50/60 Hz. / 240 VAC, 3.2 Amps, 50/60 Hz. Requires earth ground.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM