



OUTDOOR MULTI-SPORT

SCOREBOARDS

# MODEL 3688



**Size:** 32' x 8' x 8" (9.75 x 2.44 x .20 meters)

**Approximate hanging weight:** 930 lbs. (422 kg)

**Digit Size:** 30" | 24" | 18" **Digit Color:** High Intensity Red, Amber, or Translucent White



Shown in Translucent White

**Intelligent Captions™ CHANGE AUTOMATICALLY between Football, Baseball, Soccer, Lacrosse and Field Hockey facilities.**

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Large area for logo or sponsorship signage.
- Gasketed digits reduces water intake.
- Includes Possession Indicators, Time Outs Left and built-in Horn.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.

\* Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 3688 (Outdoor) Multi-Sport Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES


### MULTI-SPORT CONFIGURATIONS

MODEL 3688	MPCW-7	MPCX <sub>2</sub> WIRELESS
<b>TIMING</b> 30" High Intensity Red, Amber, or Translucent White LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
<b>TEAM SCORES</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
<b>TIME OUTS LEFT</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
<b>BALL POSSESSION INDICATORS</b> High Intensity Red, Amber, or Translucent White LED	One for each team shaped in the form of a football.	One for each team shaped in the form of a football.
<b>BALL ON</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99
<b>DOWN</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
<b>TO GO, INCHES &amp; GOAL</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99 When "Inches & Goal" are displayed, digits are blank.	Displays 0-99 When "Inches & Goal" are displayed, digits are blank.
<b>QUARTER</b> 24" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9
<b>TIME OF DAY</b>	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	N/A
<b>HORN</b>	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
<b>JUNCTION BOX</b>	One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished. (Furnished with wired option only.)	One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished. (Furnished with wired option only.)


#### FOOTBALL \*OPTIONAL CAPTION ORDER: DOWN, TO GO, BALL ON, QTR



#### SOCCER

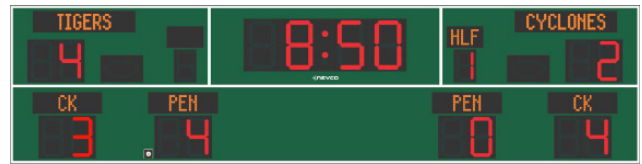


#### LACROSSE/FIELD HOCKEY

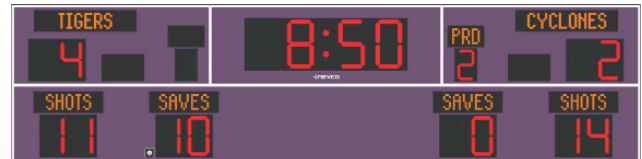

#### BASEBALL/SOFTBALL



In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 32" L x 8" H x 8" D (9.75 x 2.44 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 930 lbs. (422 kg).

**INTELLIGENT CAPTIONS:** (2) 8x48, (4) 8x32, (2) 8x16.

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER (RED/AMBER):** 120 VAC, 6.9 Amps, 50/60 Hz. / 240 VAC, 3.5 Amps, 50/60 Hz. Requires earth ground.

**POWER (TRANSLUCENT WHITE):** 120 VAC, 9.3 Amps, 50/60 Hz. / 240 VAC, 4.7 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [NEVCO.COM/WARRANTY-LIMITATION/](http://NEVCO.COM/WARRANTY-LIMITATION/)

**U.S. SERVICE:** 1-800-851-4040

**INTERNATIONAL SERVICE:** 1-618-664-0360

**CANADA SERVICE:** 1-800-461-8550

**BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:**

**WWW.NEVCO.COM**

**U.S. & CANADA:** 800-851-4040 **INTERNATIONAL:** 618-664-0360

**FAX:** 618-664-0398 **E-MAIL:** [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)



MAXIMIZE YOUR IMPACT®